




### Mower Decks

Kubota's 54"/60" mid-mount mower decks manicure lawns with precision, and their functional design allow them to be attached at the same time as the front loader.



### Cutting Height Adjustment Dial

A simple twist of the convenient dial allows you to make height adjustment in 1/4" increments to set your preferred cutting level.

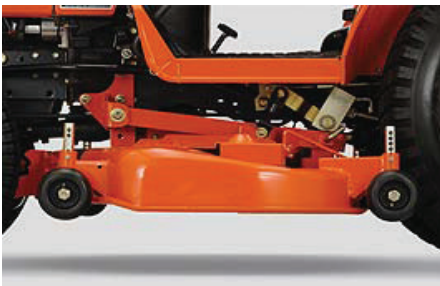

### Suspended Mower Deck

The mid-mount mower can be raised to give ample clearance, eliminating hassles when moving from job to job or riding over curbs.



### Drive-over Attachment

Attach the mower quickly and with ease. Simply drive the tractor over the mower to get it into position for fast attachment/detachment. \*Height of mower deck should be 3 inches or less.



### Self-aligning Lift Linkage



### Mid-PTO

The mid-PTO shaft spline is tapered for easy attachment of mower.



### Front Mounted Snowblower

- Available in both 50" or 51"
- Female Quick Hitch
- Half PTO Driveline
- Adjustable Skid Shoes
- Replaceable Cutting Edge
- Manual, Hydraulic, or Electric Chute Rotation
- Manual or Electric Chute Deflector



### Front Mounted Rotary Sweeper

- Front implement system which utilizes a single quick hitch and subframe
- 47" or 56.5" maximum sweeping width
- Hydraulic angling on 56.5" and manual on the 47"
- Adjustable suspension
- Mid PTO drive system
- Parking stands
- Optional side caster wheels for lawn dethatching
- Optional rubber dust deflector on 60" model



### Front Mounted Blade

- 60" front blade
- Front implement system which utilizes a single quick hitch and subframe
- Front Blade is a heavy duty blade designed for commercial use
- HD double level cutting edge
- Trip Spring design with lockout capability



### Rotary Tillers

- Available in both 34" or 40"
- Available in both 40" or 50"
- CAT 1, 3-Point hitch
- Center and offset mounting
- Built in slip clutch for system protection
- Spring loaded rear shield for smooth ground cover
- Gear box and frame are one unit assembly for greater durability



### Ballast Box

- Mounted on the three point hitch with sand or gravel to counter balance the tractor when operating with a front implement
- Holds a maximum of 400 lbs (182 kg) of dry sand
- The total weight of the ballast box with sand is 500 lbs (227 kg)
- The maximum weight allowed on the three point hitch of a B-Series tractor is 500 lbs (227 kg)
- Ballast is required in loader applications



### Rear Mounted Snowblower

- 51" Cutting width 2-stage snowblower
- 3 Point hitch mount
- Replaceable reversible cutting edge
- Oilbath gearbox
- Optional manual or hydraulic chute rotation kits available
- Optional hydraulic chute deflector or electric chute deflector



Image Not Available

### Grass Catcher

- Total collection capacity 9.75 bushels (3 grass bags)
- Impeller 6 blade, 13.5" diameter
- Impeller speed 2160 rpm
- Impeller powered by tractor rear PTO